



# F3500 Centre Drive Divider Curtain



**Mesh Panel** is 9 oz / SQYD woven polyester scrim coated in PVC, available in 6 standard colours

**Seams** are horizontal 1 1/2" overlap, RF welded and double sewn on outside edges

**Drive Tube** is 6063-T6 extruded aluminum available in 85mm, 120mm and 140mm diameters for various motor options

**Vinyl Panel** is 20 oz / SQYD woven polyester scrim coated in PVC, available in 9 standard colours. 25oz vinyl in limited colours is available

**Fire Retardant** panels with CAN/ULCS109 and NFPA-701 cert. labels


**Panels are Resistant** to mildew, rot and ultraviolet light

**Bottom Ballast** pipe is 1.315" diameter steel inside vinyl pocket with reinforced double sewn pocket ends

**Logos** available printed directly onto vinyl surface



**Somfy** motors are industry leaders in automation, proudly backed by a standard 5 year warranty

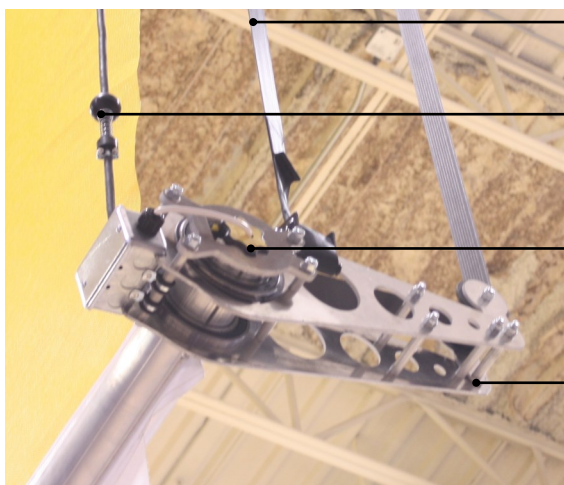

**Autoloc Safety Strap** standard on all curtains, prevents falls in emergencies

**Cord Reel** is self retracting and supplies power to motor from ceiling. Operation is from standard recessed keyswitch or wireless remote option

**Internal Tubular Motor** is CSA certified, available with 100nm, 200nm, 280nm and 400nm output torque to allow single motor operation of almost all curtain sizes. Motors are 120v except 400nm (208v3phase)

**Torque Arm** is constructed from 3/16" waterjet cut aluminum with 3/8" thick motor brackets and is assembled with 3/8" diameter hex bolts and steel spacers