

F3500 Centre Drive Divider Curtain



Mesh Panel is 11 oz / SQYD woven polyester scrim coated in PVC, available in 6 standard colours

Seams are horizontal 1 1/2" overlap, RF welded and double sewn on outside edges

Drive Tube is 6063-T6 extruded aluminum available in 85mm, 120mm and 140mm diameters for various motor options

Vinyl Panel is 18 oz / SQYD woven polyester scrim coated in PVC, available in 9 standard colours. 25oz vinyl in limited colours is available

Fire Retardant panels with CAN/ULCS109 and NFPA-701 cert. labels


Panels are Resistant to mildew, rot and ultraviolet light

Bottom Ballast pipe is 1.315" diameter steel inside vinyl pocket with reinforced double sewn pocket ends

Logos available printed directly onto vinyl surface



Somfy motors are industry leaders in automation, proudly backed by a standard 5 year warranty

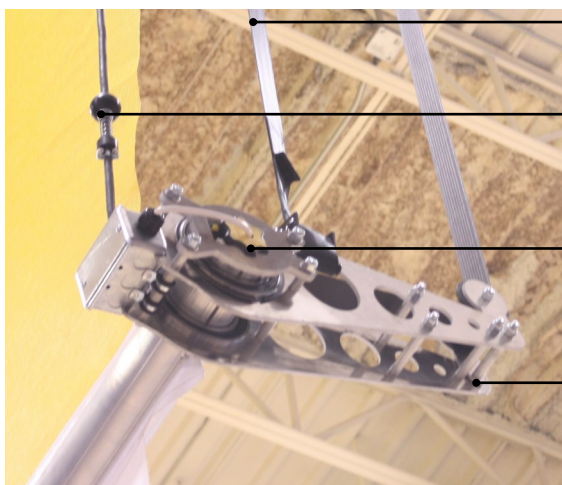

Autoloc Safety Strap standard on all curtains, prevents falls in emergencies

Cord Reel is self retracting and supplies power to motor from ceiling. Operation is from standard recessed keyswitch or wireless remote option

Internal Tubular Motor is CSA certified, available with 100nm, 200nm, 280nm and 400nm output torque to allow single motor operation of almost all curtain sizes. Motors are 120v except 400nm (208v3phase)

Torque Arm is constructed from 3/16" waterjet cut aluminum with 3/8" thick motor brackets and is assembled with 3/8" diameter hex bolts and steel spacers